
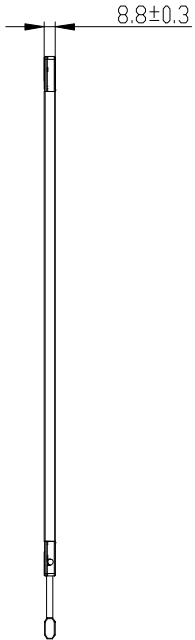


Rev.	design change reason	Date	Name
Ver 1.0	Release	2015/01/13	Damon

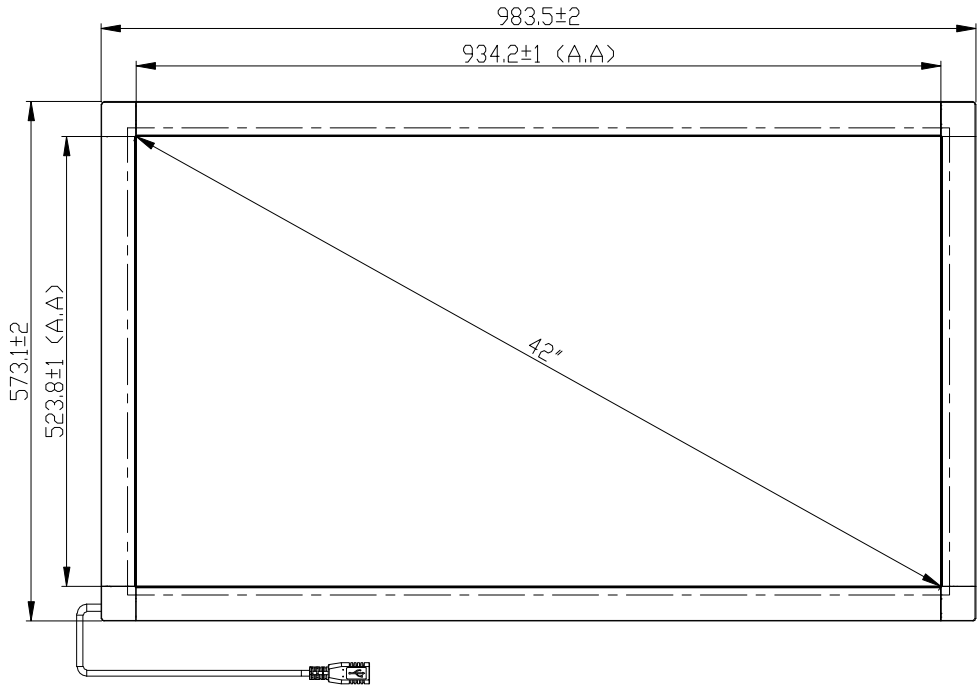

**Technical Requirements:**

- 1. Dimensionless Units: mm;
- 2. Accords with RoHS standard.

Tolerance		Fun.	Objet.	Material.	Quan.	Nota.
0 - 0.040	0.05	0.05	Projecion.	Drawn.	Revised.	
			Qty.	Checked. <td>Scale. <td></td> </td>	Scale. <td></td>	
0.05 - 0.060	±0.05	±0.05		Inspected.	AS	Eng. No.
0.06 - 0.070	±0.05	±0.05	Part No.	Date.	Dr. Adm.	
0.07 - 0.080	±0.05	±0.05	Type.	The information contained herein is confidential and proprietary, and any copying, redistribution of the information contained here is strictly prohibited without formal/written permission of PQ Labs Inc.		
0.08 - 0.090	±0.05	±0.05				
0.09 - 0.100	±0.05	±0.05				
0.10 - 0.110	±0.05	±0.05				
0.11 - 0.120	±0.05	±0.05				
0.12 - 0.130	±0.05	±0.05				
0.13 - 0.140	±0.05	±0.05				
0.14 - 0.150	±0.05	±0.05				
0.15 - 0.160	±0.05	±0.05				
0.16 - 0.170	±0.05	±0.05				
0.17 - 0.180	±0.05	±0.05				
0.18 - 0.190	±0.05	±0.05				
0.19 - 0.200	±0.05	±0.05				
0.20 - 0.210	±0.05	±0.05				
0.21 - 0.220	±0.05	±0.05				
0.22 - 0.230	±0.05	±0.05				
0.23 - 0.240	±0.05	±0.05				
0.24 - 0.250	±0.05	±0.05				
0.25 - 0.260	±0.05	±0.05				
0.26 - 0.270	±0.05	±0.05				
0.27 - 0.280	±0.05	±0.05				
0.28 - 0.290	±0.05	±0.05				
0.29 - 0.300	±0.05	±0.05				
0.30 - 0.310	±0.05	±0.05				
0.31 - 0.320	±0.05	±0.05				
0.32 - 0.330	±0.05	±0.05				
0.33 - 0.340	±0.05	±0.05				
0.34 - 0.350	±0.05	±0.05				
0.35 - 0.360	±0.05	±0.05				
0.36 - 0.370	±0.05	±0.05				
0.37 - 0.380	±0.05	±0.05				
0.38 - 0.390	±0.05	±0.05				
0.39 - 0.400	±0.05	±0.05				
0.40 - 0.410	±0.05	±0.05				
0.41 - 0.420	±0.05	±0.05				
0.42 - 0.430	±0.05	±0.05				
0.43 - 0.440	±0.05	±0.05				
0.44 - 0.450	±0.05	±0.05				
0.45 - 0.460	±0.05	±0.05				
0.46 - 0.470	±0.05	±0.05				
0.47 - 0.480	±0.05	±0.05				
0.48 - 0.490	±0.05	±0.05				
0.49 - 0.500	±0.05	±0.05				
0.50 - 0.510	±0.05	±0.05				
0.51 - 0.520	±0.05	±0.05				
0.52 - 0.530	±0.05	±0.05				
0.53 - 0.540	±0.05	±0.05				
0.54 - 0.550	±0.05	±0.05				
0.55 - 0.560	±0.05	±0.05				
0.56 - 0.570	±0.05	±0.05				
0.57 - 0.580	±0.05	±0.05				
0.58 - 0.590	±0.05	±0.05				
0.59 - 0.600	±0.05	±0.05				
0.60 - 0.610	±0.05	±0.05				
0.61 - 0.620	±0.05	±0.05				
0.62 - 0.630	±0.05	±0.05				
0.63 - 0.640	±0.05	±0.05				
0.64 - 0.650	±0.05	±0.05				
0.65 - 0.660	±0.05	±0.05				
0.66 - 0.670	±0.05	±0.05				
0.67 - 0.680	±0.05	±0.05				
0.68 - 0.690	±0.05	±0.05				
0.69 - 0.700	±0.05	±0.05				
0.70 - 0.710	±0.05	±0.05				
0.71 - 0.720	±0.05	±0.05				
0.72 - 0.730	±0.05	±0.05				
0.73 - 0.740	±0.05	±0.05				
0.74 - 0.750	±0.05	±0.05				
0.75 - 0.760	±0.05	±0.05				
0.76 - 0.770	±0.05	±0.05				
0.77 - 0.780	±0.05	±0.05				
0.78 - 0.790	±0.05	±0.05				
0.79 - 0.800	±0.05	±0.05				
0.80 - 0.810	±0.05	±0.05				
0.81 - 0.820	±0.05	±0.05				
0.82 - 0.830	±0.05	±0.05				
0.83 - 0.840	±0.05	±0.05				
0.84 - 0.850	±0.05	±0.05				
0.85 - 0.860	±0.05	±0.05				
0.86 - 0.870	±0.05	±0.05				
0.87 - 0.880	±0.05	±0.05				
0.88 - 0.890	±0.05	±0.05				
0.89 - 0.900	±0.05	±0.05				
0.90 - 0.910	±0.05	±0.05				
0.91 - 0.920	±0.05	±0.05				
0.92 - 0.930	±0.05	±0.05				
0.93 - 0.940	±0.05	±0.05				
0.94 - 0.950	±0.05	±0.05				
0.95 - 0.960	±0.05	±0.05				
0.96 - 0.970	±0.05	±0.05				
0.97 - 0.980	±0.05	±0.05				
0.98 - 0.990	±0.05	±0.05				
0.99 - 1.000	±0.05	±0.05				

G5S-42"  
**PQ Labs**